

HP400 HAND PACK SYSTEM

The **HP400** is a simple manually operated integrated system.

Hand Pack Station

Here is a simple configuration containing two standard Hoplite machines: a **CT2500** and **CE2500** connected with a section of live roller conveyor. Controls and case sequencing will always have an empty box waiting for the operator to fill. This creates a simple hand pack station that allows an operator to receive an empty case on demand. There is then the opportunity to manually fill the case at the operator's pace, and the depressing of a foot switch releases the full case to the taper.


The live roller conveyor is divided into 3 sections: a live outfeed from the erector; a live infeed to the case sealer; and an operator foot controlled center section (pack station).

Options

- Full stainless steel construction
- Partial stainless steel construction
- Electrical (480/3/60)

Standard Utilities

- 220/3/60 Electrics

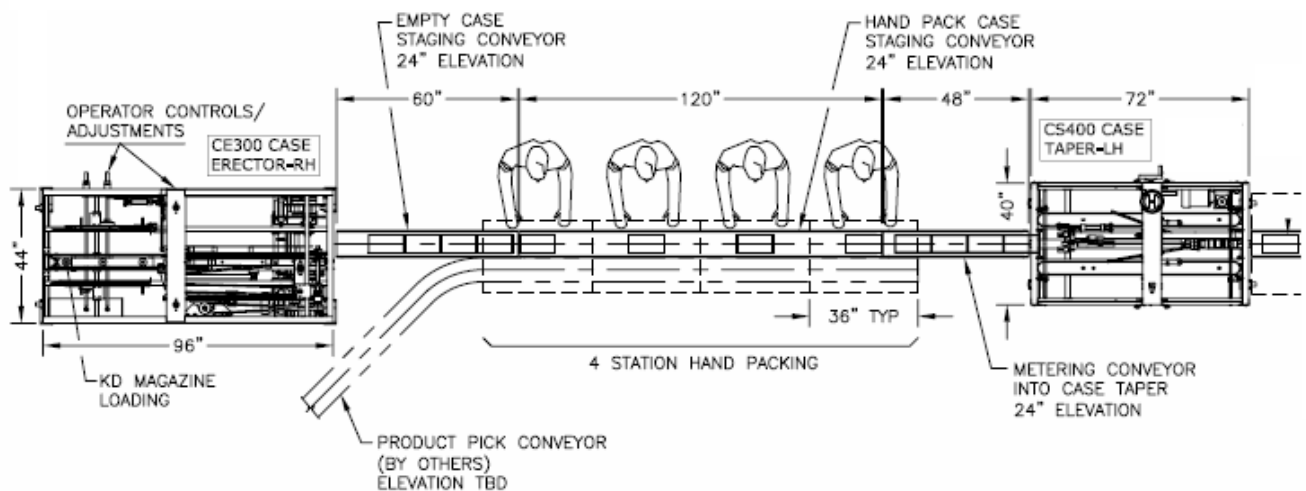

67 Victoria Str E, PO Box 10074 Alliston, Ontario Canada L9R 0B7

Tel: 705-999-3755

www.hoplite-ltd.com